

Brass Gate Valve - PN20




LV 2015

Screwed BSPT, Brass Body & Bonnet, Cast Handwheel

Pressure / Temperature Specifications	
Pressure	PN20
Temperature	-10°C to 100°C (up to 85°C for WRAS use)

Material Specifications	
1. Body	Brass
2. Wedge	Brass
3. Stem	Brass
4. Bonnet	Brass
5. Gasket	PTFE
6. Lock Nut	Brass
7. Packing	PTFE
8. Brass Ring	Brass
9. Hex Gland Nut	Brass
10. Handwheel	Cast Iron
11. Name Plate	Aluminium
12. Hex Nut	Carbon Steel

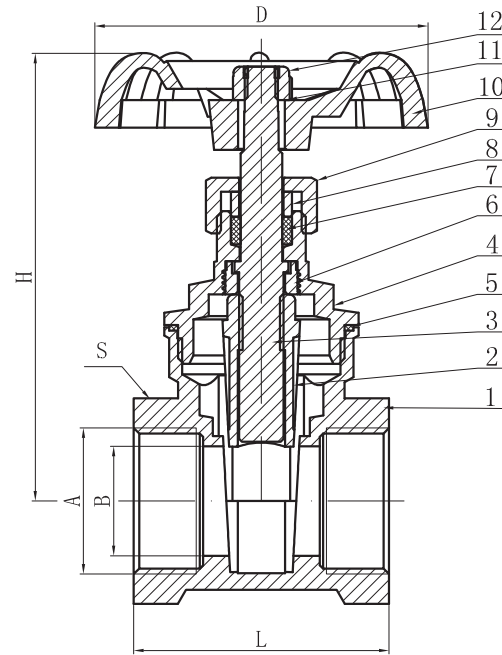

Dimensions							
Size (A)	L	H	D	B	S	Kv	Kg
1/4"	36	66.5	53	10	21	-	0.2
3/8"	36	66.5	53	10	21	-	0.19
1/2"	42	73	53	14.7	26.5	14.0	0.24
3/4"	46	80	60	19.7	33	32.0	0.33
1"	52	91	60	25	40	57.0	0.47
1 1/4"	56	105	72	29	48	90.0	0.63
1 1/2"	60	115	72	33.7	54.5	129.0	0.85
2"	68.5	135	90	45	67.5	230.0	1.4
2 1/2"	87.5	170	100	57	83	428.0	2.4
3"	94	194	110	70	96	680.0	3.5
4"	106	240	145	90	124	1088.0	5.7

Last updated 19/08/2025