

# Brass Foot Valve + Strainer

LV 2350



Screwed BSPP, Brass Body, Metal Disc



Pressure / Temperature Specifications		
Pressure	PN10	¾" to 1"
	PN8	1¼" to 2"
	PN6	2½" to 4"
	Temperature	0°C to 60°C

Material Specifications		
1	Body	Brass CW617N
2	Disc	Brass CW617N
3	Filter	Brass CB753S
4	Disc Gasket	NBR
5	Filter Gasket	Non-asbestos Fiber

Dimensions				
G	D	H	S	Kg
¾"	45	70	2.2	0.2
1"	51	82	2.5	0.3
1¼"	61	95	2.0	0.51
1½"	69	103	2.5	0.6
2"	80	121	3.0	0.91
2½"	100	140	4.0	1.5
3"	121	175	4.0	2.12
4"	141	195	4.3	3.58

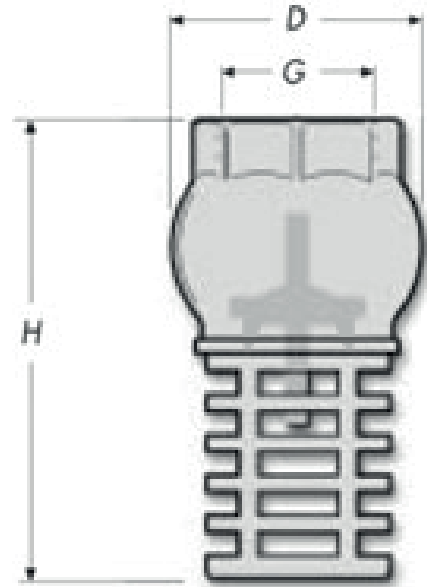

S: Maximum passage dimension of indeformable solid media