

Brass Y Type Strainer

1/2" to 2"



LV 2500

Screwed BSPP, Brass Body, Stainless Steel Mesh,
0.5mm Mesh 1/4" to 2", 0.8mm 2 1/2" & 3", 1.2mm 4"



Pressure / Temperature Specifications


Pressure	PN16
Temperature	-20°C to 180°C (Max 85°C for WRAS use)

Material Specifications

Body	CW617N Brass
Bonnet	CW617N Brass
Gasket	PTFE
Filter	AISI 304L Stainless Steel

Dimensions

A	W	E	F	C	µm	Kv	Kg
1/4"	20	46	9	40	500	-	0.11
3/8"	20	46	9	40	500	3.43	0.1
1/2"	24	56	9.5	40	500	4.48	0.12
3/4"	30	68	10	48	500	7.86	0.2
1"	38	76	12.9	51	500	11.0	0.3
1 1/4"	47	96	18	65	500	16.0	0.49
1 1/2"	54	106	19	75	500	22.0	0.65
2"	65	128	19	90	500	35.0	1.1
2 1/2"	84	145	25	110	800	60.0	1.9
3"	96	168	22.8	128	800	83.0	2.8
4"	122	181	26	150	1200	100.0	4.5

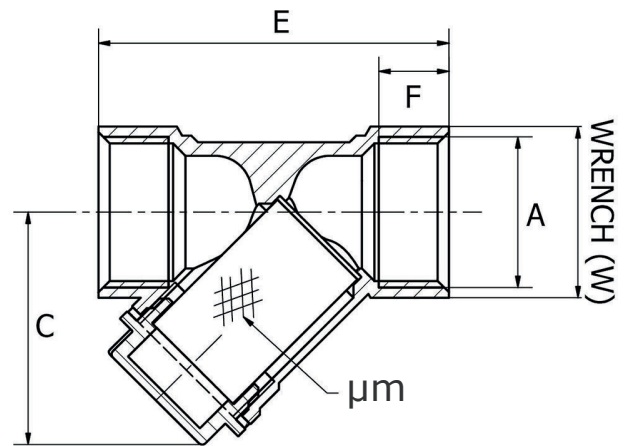

Pressure Drop Chart

