

Cast Iron Float Valve - Flanged PN16 - Angle Pattern

LV 5290

Flanged PN16, Cast Iron Body & Bonnet, Epoxide Float, Stainless Steel Stem & Disc, Angle Pattern



Pressure / Temperature Specifications

Pressure	PN10
Temperature	-10°C to 90°C


Material Specifications

1. Body	EN GJL 250 Cast Iron
2. Cover	EN GJL 250 Cast Iron
3. Disc	X20Cr13 Stainless Steel
4. Stem	X20Cr13 Stainless Steel
5. Disc Gasket	EPDM
6. Packing Ring	EPDM
7. Hexagon Bolt	Steel
8. Lever	Zinc Coated S235JR Steel
9. Float	Epoxy Coated S235JR Steel
10. Piston Sleeve	CuZn39Pb2

Dimensions

DN	L	A	B	C	H1	Hp	Dp	Kv	D	K	n x d	Kg
2"	125	35	700	15	277	200	350	53.3	165	125	4 x 19	20.0
2½"	145	45	700	15	341	250	400	88.6	185	145	4 x 19	26.0
3"	155	55	800	15	352	250	400	139.2	200	160	8 x 19	29.0
4"	175	71	975	25	395	300	400	217.2	220	180	8 x 19	37.0
5"	200	87	1190	25	480	300	500	301.7	250	210	8 x 19	54.0
6"	225	102	1305	25	550	300	500	424.2	285	240	8 x 23	81.0
8"	275	138	1590	25	620	400	500	715.8	340	295	8 x 23	130.0

DN 25-80

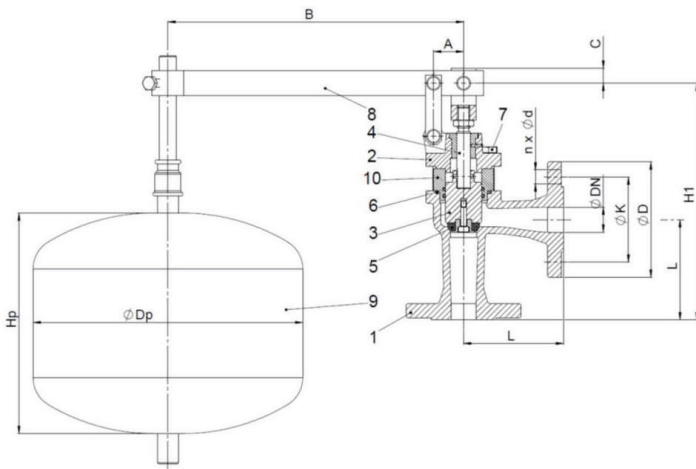

DN 100-200

