

Ductile Iron Ball Valve - Flanged PN16 - For Abrasive Mediums


LV 5549

ISO 5211 for Direct Mount, Flanged PN16, Ductile Iron Body, Stainless Steel Ball & Stem, Bronze Seats, Lever Operated. For Abrasive Mediums.



Pressure / Temperature Specifications	
Pressure	PN16
Temperature	-20°C to 200°C

Materials		
1.	Body	GGG40 Ductile Iron
2.	Ball	304 Stainless Steel
3.	Stem	420 Stainless Steel
4.	Seats	Bronze
5.	O-ring	PTFE
6.	Handle	Forged Aluminium

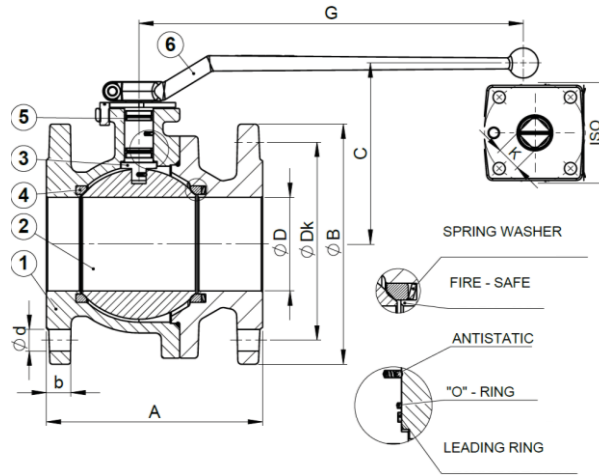

Dimensions												
DN	A	ØB	C	ØD	G	b	ØDk	Ød	No.	ISO	K x h	Kg
1"	125	115	83	25	150	18	85	14	4	F04	11 x 13.5	3.6
1¼"	130	140	102	32	210	18	100	18	4	F04	14 x 18	5.4
1½"	140	150	107	40	210	18	110	18	4	F05	14 x 18	6.9
2"	150	165	120.5	50	210	20	125	18	4	F05	14 x 18	8.9
2½"	170	185	140	63.5	320	18	145	18	4	F07	17 x 23	14.6
3"	180	200	151	78	320	20	160	18	8	F07	17 x 23	20.1
4"	190	220	166	99	320	20	180	18	8	F07	17 x 23	26.0
5"	325	250	201	124	500	22	210	18	8	F10	22 x 27	50.0
6"	350	285	218	149	500	22	240	22	8	F10	22 x 27	69.5

Last updated 31/03/2020