

Stainless Steel Bib Tap with Hose Connection - Lockable

LV 6156

Screwed BSPP Male, CF8M Stainless Steel Body, RPTFE Seat, Lockable Lever Operated



Pressure / Temperature Specifications


Pressure	PN16
Temperature	-20°C to 120°C

Dimensions

Size	D	H	L	W	Kg
1/2"	12	91	149	90	0.26
3/4"	16.5	102	156	90	0.32
1"	20	116	145	90	0.34

Material Specification

1. Handle Cover	Plastic
2. Handle	304 Stainless Steel
3. Screw	304 Stainless Steel
4. Double Spring Washer	304 Stainless Steel
5. Stem	316 Stainless Steel
6. O-ring	NBR
7. Stem Seals	PTFE
8. Seals	PTFE
9. Cover	CF8M Stainless Steel
10. Seat	RPTFE
11. Ball	CF8M Stainless Steel
12. Body	CF8M Stainless Steel
13. Screw	CF8M Stainless Steel
14. Seal	NBR
15. Hose Connection	CF8M Stainless Steel

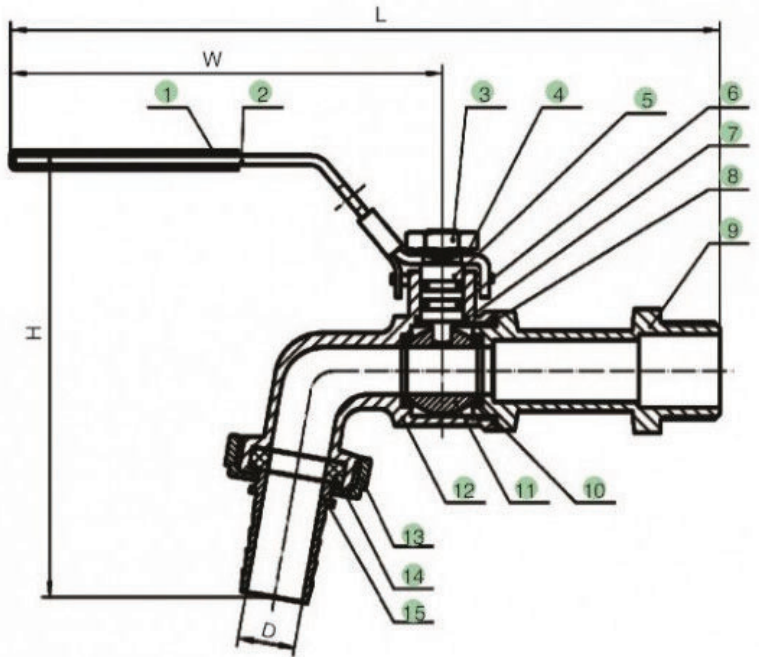

Last updated 08/04/2025