

Double Flanged Butterfly Valve - EPDM Liner - PN16



Components


ISO 5211 for Direct Mount, Epoxy Coated Ductile Iron Body, Ductile Iron Disc, EPDM Liner, Gearbox Operated

Pressure / Temperature Specifications

Pressure	PN16
Temperature	-10°C to 120°C


Materials

1. Bolt	Carbon Steel
2. Washer	304 Stainless Steel
3. Bottom Plate	Ductile Iron
4. Body	Ductile Iron
5. Bushing	304 Stainless Steel
6. Liner	EPDM
7. Disc	Ductile Iron
8. Pin	420 Stainless Steel
9. Shaft	420 Stainless Steel
10. Shaft Bushing	Brass
11. Stud	Carbon Steel
12. Washer	304 Stainless Steel
13. Bushing	304 Stainless Steel
14. O-ring	NBR

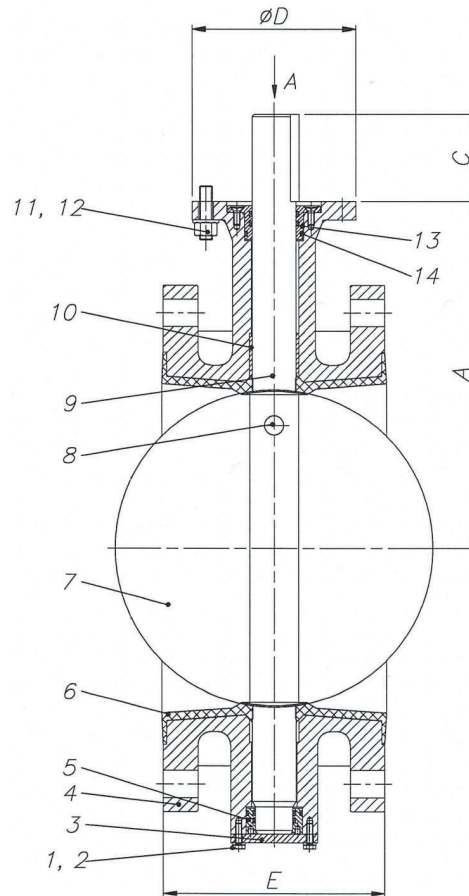


View A

3"-18"

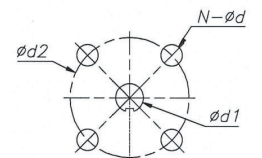

20"-24"



Dimensions

Size	E	A	C	D	d1	d2	n x Ød	ISO	Kg
3"	127	160	55	90	14	70	4 x 10	F07	20.0
4"	127	178	55	90	14	70	4 x 10	F07	24.0
6"	127	213	55	125	25	102	4 x 12	F10	33.0
8"	152	245	55	125	25	102	4 x 12	F10	48.0
10"	203	276	55	125	25	102	4 x 12	F10	60.0
12"	203	318	80	150	40	125	4 x 14	F12	80.0
14"	203	357	80	150	40	125	4 x 14	F12	205.0
16"	203	408	100	210	45	165	4 x 22	F16	250.0
18"	203	438	100	210	45	165	4 x 22	F16	316.0
20"	203	471	100	210	48	165	4 x 22	F16	465.0
24"	203	573	100	210	48	165	4 x 22	F16	623.0